

# POSTŘIKOVAČE VYRSA



## POSTŘIKOVAČ VYR-2001



### Technické parametry:


- postřikovač vyrobený z mosazi,
- kruhový,
- 3/4" vnější závit.

	9/64" 3,57 mm.		5/32" 3,96 mm.		11/64" 4,36 mm.		3/16" 4,76 mm.		13/64" 5,15 mm.		7/32" 5,55 mm.	
Bars	Lit./h.	Ø mts.	Lit./h.	Ø mts.	Lit./h.	Ø mts.	Lit./h.	Ø mts.	Lit./h.	Ø mts.	Lit./h.	Ø mts.
1,75	660	26,2	800	27,8	960	29,4	1.140	30	1.340	30,8	1.550	31,2
2,1	720	27	870	28,8	1.050	30	1.250	30,6	1.480	31,4	1.720	32
2,46	770	27,6	940	29,4	1.140	30,6	1.360	31,2	1.610	32	1.880	33
3,16	870	28,4	1.070	30,2	1.290	31,4	1.550	32,4	1.880	33,2	2.140	34,3
3,51	920	28,8	1.130	30,6	1.360	31,8	1.630	32,6	1.930	33,6	2.240	36,6
4,21	990	29,4	1.230	31,2	1.490	32,4	1.780	33,2	2.990	34,3	2.410	36,8

	9/64 x 3/32" 3,57 x 2,38 mm.		5/32 x 3/32" 3,96 x 2,38 mm.		11/64 x 3/32" 4,36 x 2,38 mm.		3/16 x 1/8" 4,76 x 3,17 mm.		13/64 x 1/8" 5,15 x 3,17 mm.		7/32 x 1/8" 5,55 x 3,17 mm.	
Bars	Lit./h.	Ø mts.	Lit./h.	Ø mts.	Lit./h.	Ø mts.	Lit./h.	Ø mts.	Lit./h.	Ø mts.	Lit./h.	Ø mts.
1,75	920	26	1.100	27,6	1.250	29	1.680	29,40	1.880	30,2	2.100	30,6
2,1	1.000	26,6	1.200	28,4	1.380	29,6	1.850	30	2.080	30,8	2.320	31,4
2,46	1.090	27,2	1.300	29	1.490	30,2	2.000	30,6	2.260	31,4	2.520	32,4
3,16	1.250	28,2	1.470	30	1.690	31,2	2.290	31,8	2.570	32,6	2.880	34,2
3,51	1.330	28,4	1.550	30,2	1.790	31,4	2.410	32	2.700	33,2	3.020	35
4,21	1.440	29	1.700	30,8	1.950	32	2.630	32,6	2.950	34,2	3.270	36,2



## POSTŘIKOVAČ VYR-23

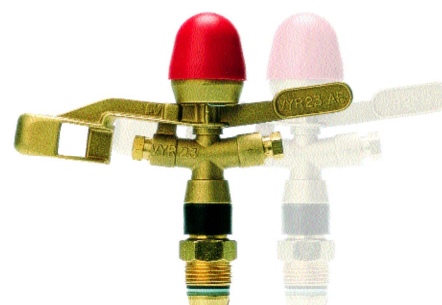

### Technické parametry:

- postřikovač na protimrazovou závlahu,
- nízký úhel vodního paprsku,
- kruhový,
- vyrobený z mosazi a nerez oceli,
- postřikovač **VYR-2301** – 3/4" vnější závit,
- postřikovač **VYR-2302** – 3/4" vnitřní závit.

	11/64" - 4,4 mm.		3/16" - 4,8 mm.		13/64" - 5,2 mm.		7/32" - 5,5 mm.		15/64" - 6 mm.		1/4" - 6,3 mm.		17/64" - 6,7 mm.	
Bar	Lit./h.	Ø mts.	Lit./h.	Ø mts.	Lit./h.	Ø mts.	Lit./h.	Ø mts.	Lit./h.	Ø mts.	Lit./h.	Ø mts.	Lit./h.	Ø mts.
1,5	890	21,2	1.050	21,4	1.220	21,4	1.400	21	1.590	20,5	1.790	21	2.010	21
2,0	1.030	21,8	1.220	22	1.410	22,4	1.620	22	1.840	22	2.070	22,5	2.300	22,5
2,5	1.150	22,2	1.360	22,5	1.580	22,8	1.810	23	2.050	23	2.310	23	2.500	23,4
3,0	1.260	22,4	1.490	22,8	1.730	23,2	1.980	23,4	2.250	23,4	2.530	23,5	2.800	23,6
3,5	1.360	22,6	1.610	23	1.860	23,4	2.140	23,6	2.430	23,5	2.740	23,6	3.100	23,8
4,0	1.450	23	1.720	23,5	2.010	23,6	2.300	24	2.610	23,6	2.950	23,8	3.400	24

J + J závlahové systémy, s.r.o., Příčná 24, 290 01 Senice

Tel./fax: 325 652 064, 325 652 365-6, e-mail: jerabek@zavlahy-jerabek.cz, www.zavlahy-jerabek.cz